

BUSTER 1100

≤ 165 m*

*Based on ANSI Beam FC1

≤ 50 h

SAFE

OSRAM
LEDs Included



A
Ø 22 - 35mm




NL Dubbele lens met OSRAM LED's
FR Lentilles doubles avec LED OSRAM
IT LED OSRAM a doppie lenti
ES Doble lente con LEDs OSRAM



NL USB-C snellaadfunctie
FR Recharge rapide par USB-C
IT Funzione di carica rapida USB-C
ES Carga rápida por USB-C



NL Zijdelingse zichtbaarheid
FR Visibilité latérale
IT Visibilità laterale
ES Visibilidad lateral

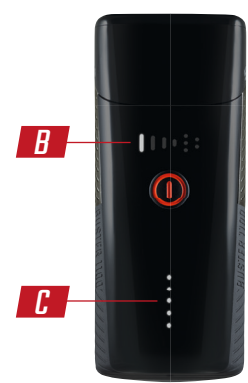

BUSTER 1100 MODES			
MODE	INDICATOR	LUMENS	RUN TIME
High		≈ 1100	≈ 2 h
Mid		≈ 800	≈ 2.5 h
Low		≈ 400	≈ 5 h
Eco		≈ 150	≈ 16 h
Night Flashing		≈ 800/ 400	≈ 5 h
Day Flashing		≈ 200	≈ 50 h

A
NL 3D-instelbare houder incl. snelspanner
FR Support ajustable 3D avec serrage rapide
IT Supporto 3D regolabile. Sgancio rapido incl.
ES Soporte ajustable en 3D incl. cierre rápido

B
NL 6 Lichtmodus indicator met 5 voorinstelbare „licht-profielen“ en licht-modus geheugenfunctie
FR Témoin du mode éclairage à 6 niveaux 5 Profils pré-réglés & Mémoire du mode
IT Visualizzazione di 6 modalità sul display con 5 profili di modalità preinstallati + modalità memoria
ES Indicador de 6 modos con 5 perfiles preajustados y memoria del último modo utilizado

C
NL 6-traps accu-indicator
FR Témoin de charge à 6 niveaux
IT Indicatore batteria a 6 livelli
ES Indicador de nivel de batería de 6 niveles

Contents



BUSTER 1100 LUMENS

SIGMA

BUSTER 1100 LUMENS

POWER ON
EXPERIENCE THE
LIGHT OF THE BUSTER



BUSTER 1100 LUMENS



SIGMA-ELEKTRO GmbH Dr.-Julius-Leber-Str. 15 87433 Neustadt/Wstr. Germany service@sigma.bike

sigma.bike



179851/4